



青岛丽安防护新材有限公司

QINGDAO LIFE ANGEL PROTECTION PRODUCTS CO., LTD

工厂地址：山东省青岛市黄岛区铁山工业园背儿山路17号

Factory address: No 17, Beiershan Road, Tieshan Industrial Zone,
Huangdao District, Qingdao City, Shandong Province, China.

Tel : +86-532-86164098

Fax : +86-532-86113358

E-mail : qdgn@rubbertile.cn

Web : www.rubber-mat.net

www.rubbertile.cn

www.qdxiangjiaoban.com (中文)



青岛丽安防护新材有限公司

QINGDAO LIFE ANGEL PROTECTION PRODUCTS CO., LTD

Product Catalogue | 产品画册

中国·青岛



COMPANY PROFILE

青岛丽安防护新材有限公司成立于2001年，地处青岛市黄岛区铁山工业园。公司生产基地占地3.8万平方米，交通便利，距青岛港30公里，是一家集科研，生产，销售为一体的专业环保橡胶材料高新技术企业。

Qingdao Life Angel Protection Products Co., Ltd was founded in 2001, located in the Tieshan industry Zone, Huangdao District, Qingdao City. Our factory covers a total area of 38 thousands square meters. It is 30 kilometers distance to the Qingdao port so the transportation is very convenient. Our company is a professional, high-technical enterprise, focus on studying, manufacturing and selling the eco-friendly rubber products.

公司自成立以来，秉持“用良心制作产品，用爱心回报社会”的经营理念，以环保和科技为先导，针对客户需要，研发优质环保橡胶地面材料，服务于多种公共场所和交通道路、畜牧养殖、水面溢油、防护等行业场所，着力于研发、质管、售后管理体系的配套。我公司产品具有色彩丰富、环保无味、防滑耐磨、抗静电、耐老化以及易清洁等特点，并且立足于时尚潮流，防护和装饰功能兼备，被广泛用于体育场地、学校、幼儿园、养老院、医院、商业厨房、地铁及机场通道等场所。完善的售前、售后服务也取得了国内外客户的普遍认可。

Since the establishing, our company uphold the business philosophy of “Manufacturing products with conscientiousness, Returning the society with love”, taking the environmental protection and technology as the guidance, paying high attention to the customers' request, and always study on the high quality eco-friendly rubber ground material, which is

widely used for variety public range, road traffic, animal husbandry, oil spill and safety protection industry market. We have establish a perfect support system of research and development, quality controlling and after sales service. Our products' features are colorful, eco-friendly, anti-skid, wear resistance, anti static and aging resistance and easy to clean etc. Basing on the fashion trends, function of both protective and decorative function, our products have been widely used for sports venues, schools, kindergartens, nursing homes, hospitals, hotel kitchen, subway and airport channel etc. Perfect pre-sales, after-sales service have also been confirmed by our domestic and oversea customers.

公司始终致力于提高产品的品质，追求客户对产品的良好体验，公司于2002年率先取得自营进出口权并被评定为海关A类信誉企业，顺利通过ISO9001质量认证体系，EN1177安全认证。我公司先后授予山东省重合同守信用企业、高新技术企业、中国橡胶工业协会推荐品牌等荣誉称号。由于我们的不懈努力和诚信经营，我们的产品已遍布全国各地，并远销欧美及东南亚等国家和地区。

Our company always insist on improving product quality, pursuing the good experience on the products responded from our clients. Our company acquire the Import Export License in 2002, and was rated as an A-level credit enterprise by Customs. We have got the ISO9001 quality management system certificate and EN1177 safety certificate. Our company are successively awarded many honors, such as of Shandong Province Observe Contracts and Trustworthy Enterprise, High and New Technology Enterprise, China Rubber Industry Association Recommended Brand. With the unremitting efforts and research on the good faith management, our products sell well all over the country, and export to Europe, the United States and Southeast Asia etc.



COMPANY IDENTITY

企业面貌



生产设备
Producing facility



技术中心
Technology Center



实验室
Laboratory



客户合影
Photo with clients



产品检验
Product Inspection



发货区
Dispatch Area

CERTIFICATIONS

资质证书



Part.1



Part.2



Part.3



Part.4



Part.5



Part.6



01

DRAINAGE RUBBER MAT

疏水场所类橡胶垫

酒店厨房，浴室，
卫生间，滑雪场，
货仓车，船甲板等
疏水场所类橡胶垫

P7-P15

03

RUBBER FLOOR/ TILE/PAVER

橡胶地板

学校，医院，公
园，机场，地铁，
儿童游乐场，体育
场馆，健身中心，
养老院等橡胶地板

P21-P37

04

RUBBER STABLE MAT FOR ANIMALS

畜牧类橡胶垫

奶牛卧床及通道，
马厩，猪场，鸡舍
等畜牧产所

P38-P43

06

THE ENVIRONMENT PROTECTION OIL SPILL CONTROL EQUIPMENT

环保溢油设备

船舶油污水处理、
河海溢油防治系列
围油栏、收油机、
吸油毡、消油剂等
产品

P52-P58

02

ANTI-SLIP RUBBER SHEET ROLL

地面防滑类橡胶板

工业设备配套，操
作台面，通道，仓
储地面，电站绝
缘，路桥地面防滑
类橡胶板

P16-P20

05

ROAD TRAFFIC SAFETY FACILITIES

安全防护类橡胶垫

道路施工防护，交
通配套设施，停车
场，特种安全标识

P44-P51

目录

CONTENTS

DRAINAGE RUBBER MAT 疏水场所类橡胶垫

DRAINAGE RUBBER MAT 疏水场所类橡胶垫

酒店厨房，浴室，卫生间，滑雪场，船甲板等疏水场所类橡胶垫。

The drainage rubber mats are widely used in the hotel kitchen, bathroom, toilet, ski resorts, warehouse, deck etc.

- **材质：**天然橡胶NR，丁苯橡胶SBR，丁腈橡胶NBR或三元乙丙橡胶EPDM等，可根据要求定做耐油、耐酸碱、防静电、绝缘、抑菌、阻燃等特殊材质。
- **用途：**防止意外滑倒损伤；减少疲劳感；保护室外花园草坪植物生长；生产性场所防止部件坠落损坏。
- **特点：**无异味环保合成橡胶，色彩艳丽美观、材质柔软韧性好，孔径有利于排水，防滑且方便卫生清洁。
- **Material:** Natural Rubber (NR), styrene-butadiene Rubber (SBR), nitrile Rubber (NR) or EPDM Rubber etc. It can be customized to meet customers' need with oil-proof, acid and alkali-resistance, anti-static, insulation, anti-bacterial and fire-resistance features etc.
- **Application:** Prevent accident damage from skidding; reduce the feeling of fatigue; protect the outer garden lawn plant growing, prevent the accident injury in the producing area.
- **Features:** No smell eco-friendly synthetic rubber, gorgeous and beautiful colors, good toughness material, the hollow is helpful for drainage, anti-slip and easy to clean.

可选颜色 Available color



GM0400

2420*910*9mm (95.2"x35.8"x0.35") 28KG/PC



正面 Top



背面 Bottom

可选颜色 Available color



GM0401

2420*910*10mm (95.2"x35.8"x0.39") 26KG/PC



正面 Top




背面 Bottom



DRAINAGE RUBBER MAT 疏水场所类橡胶垫

可选颜色 Available color

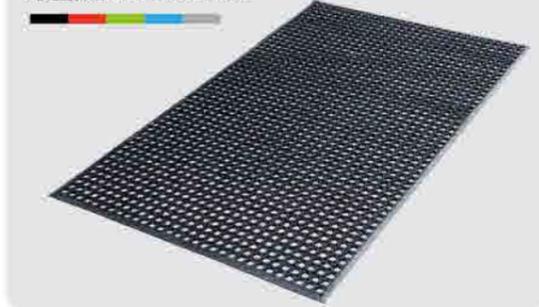


GM0402A/GM0402B



正面 Top

GM0402A 1524*914*12mm(5'x3'x1/2") 8.4KG/PC
GM0402B 914*610*12mm(3'x2'x1/2") 3.4KG/PC



背面 Bottom

带砂门垫 Rubber door mat with grit

可选颜色 Available color



GM0410 1.2m*0.9m*15mm (3.94'x2.95'x0.6") 11.3KGS/PC




正面 Top (砂光面 Abrasive)



背面 Bottom (长孔 Hollow)

DRAINAGE RUBBER MAT 疏水场所类橡胶垫

可选颜色 Available color

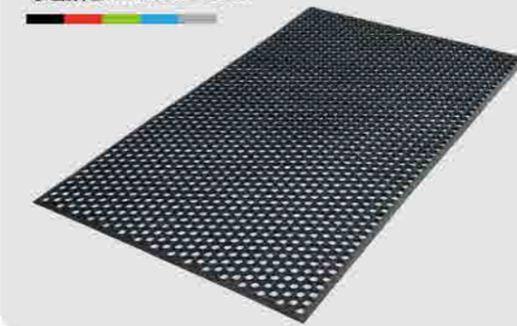



正面 Top

GM0405C 1500*900*11mm (59"x35.4"x0.43") 9.0KG/PC



背面 Bottom

可选颜色 Available color

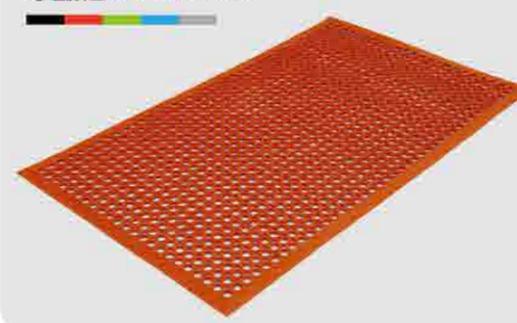


正面 Top

GM0406 1524*914*12mm(5'x3'x1/2") 8.0KG/PC



背面 Bottom

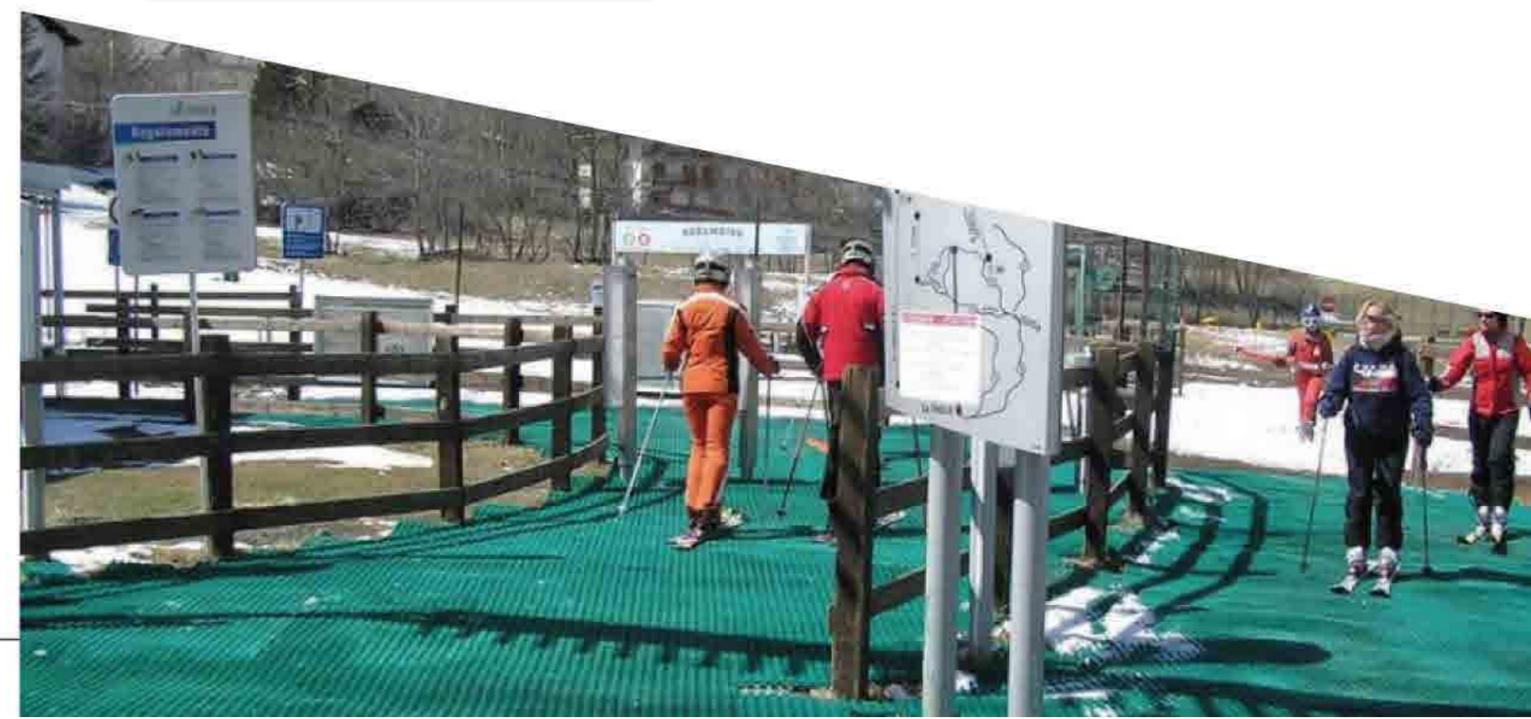




DRAINAGE RUBBER MAT 疏水场所类橡胶垫


DRAINAGE RUBBER MAT 疏水场所类橡胶垫

可选颜色 Available color

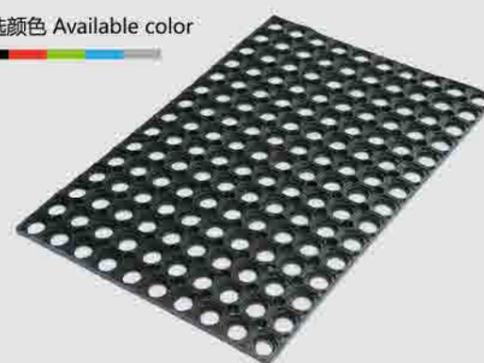

型号 Item	尺寸 Size	重量 Weight
GM0404A	1020*1020*13mm (40.2"x40.2"x0.51")	7.2KG/PC
GM0404B	1000*1000*15mm (39.3"x39.3"x0.59")	9.4KG/PC
GM0404C	800*800*15mm (31.5"x31.5"x0.59")	6.7KG/PC
GM0404D	1500*1000*22mm (59"x39.3"x0.87")	19KG/PC
GM0404E	630*420*15mm(24.8"x16.5"x0.59")	1.85KG/PC
GM0404F	1500*1000*19mm (59"x39.3"x0.75")	17KG/PC
GM0404G	800*500*22mm (31.4"x19.6"x0.87")	5.6KG/PC

可选颜色 Available color

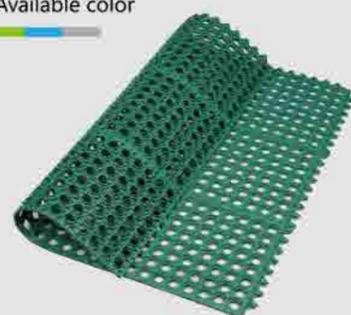


正面 Top



背面 Bottom

GM0407 914*914*12mm(3'x3'x1/2") 5.2KG/PC

可选颜色 Available color

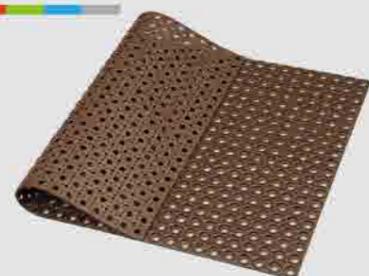

正面 Top



背面 Bottom

GM0409 900*600*7mm(35.4"x23.6"x0.28") 3.3KG/PC




正面 Top



背面 Bottom



链接 Interlock

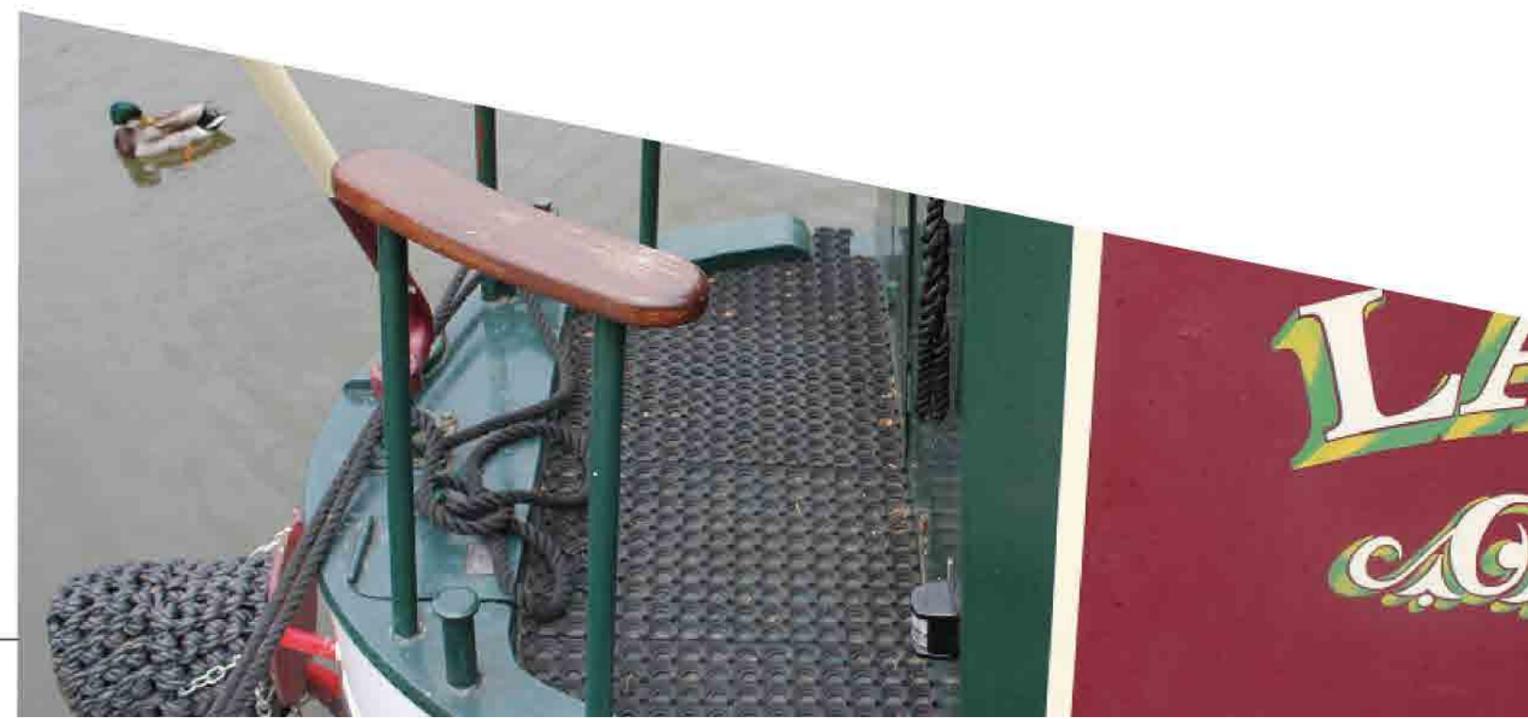




DRAINAGE RUBBER MAT

疏水场所类橡胶垫


DRAINAGE RUBBER MAT

疏水场所类橡胶垫

可选颜色 Available color

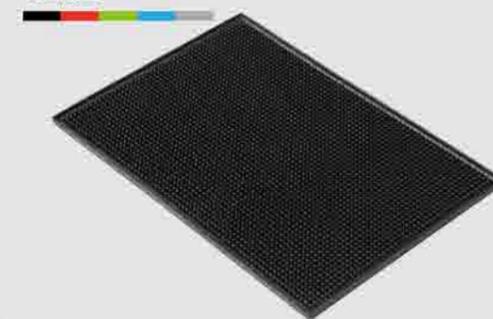


正面 Top



正面 Top

GM0408 448*299*11mm(17.6"x11.8"x0.43") 1.4KG/PC

可选颜色 Available color

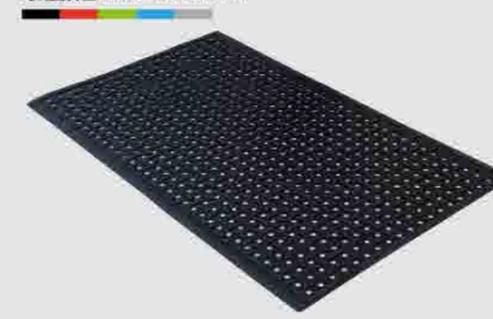



正面 Top




背面 Bottom

GM0415A 1390*850*8mm(54.7"x33.5"x0.31") 7.4KG/PC
GM0415B 1450*850*8mm(57.1"x33.5"x0.31") 8.0KG/PC

可选颜色 Available color

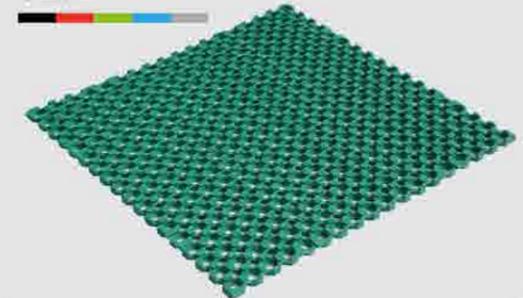


正面 Top



背面 Bottom

GM0411 800*800*18mm(31.5"x31.5"x0.71") 6.8KG/PC

可选颜色 Available color

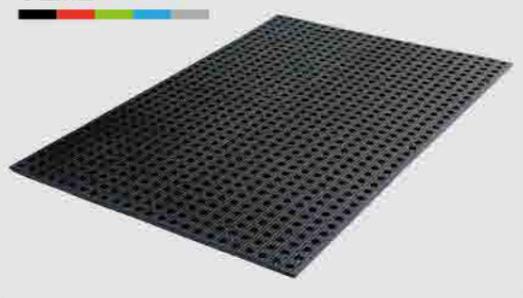

正面 Top



背面 Bottom

GM0422 1640*1100*18mm(64.6"x43.3"x0.71") 35KG/PC




ANTI-SLIP RUBBER SHEET ROLL 地面防滑类橡胶板

工业设备配套，操作台面，通道，仓储地面，电站绝缘，路桥地面防滑类橡胶板。
The rubber sheets are used in industrial equipment matching ,operation platform, passage, storage ground, power station, road and bridge.

- **材质:** 天然橡胶NR, 丁苯橡胶SBR, 丁腈橡胶NBR或三元乙丙橡胶EPDM等, 可根据要求定做耐油、耐酸碱、防静电、绝缘、抑菌、阻燃等特殊材质。
- **用途:** 建筑领域、通道、公共场所坡路等易湿滑的地方及野外道路应急救援; 卷材类产品方便大面积铺装。
- **特点:** 表面防滑效果好, 易清洁, 可根据客户要求定做阻燃、耐油、耐酸碱、防静电等特殊用途。
- **Material:** Natural Rubber (NR), Styrene-butadiene Rubber(SBR), Nitrile Rubber(NR) or EPDM Rubber etc. It can be customized to meet customers' need with oil-proof, acid and alkali-resistance, anti-static, insulation, anti-bacterial and fire-resistance features etc.
- **Application:** Building field, passage, the ramp in public place and road emergency rescue at wild; It's easy to pave for a large area.
- **Features:** It's good anti-slip on the surface, easy to clean, It can be customized to meet customers' need with fire-resistance, oil-proof, acid and alkali-resistance, anti-static etc.

DRAINAGE RUBBER MAT 疏水场所类橡胶垫

可选颜色 Available color

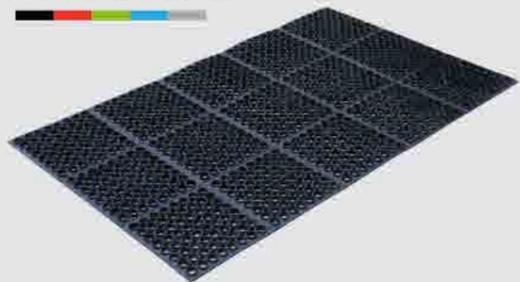

正面 Top



背面 Bottom

GM0433 1520*910*16mm (3'x5'x0.63") 10.5KG/PC

可选颜色 Available color




正面 Top



背面 Bottom

GM0436 1m*20m*10mm (3.28'x65.6'x0.39") 9.7KG/M

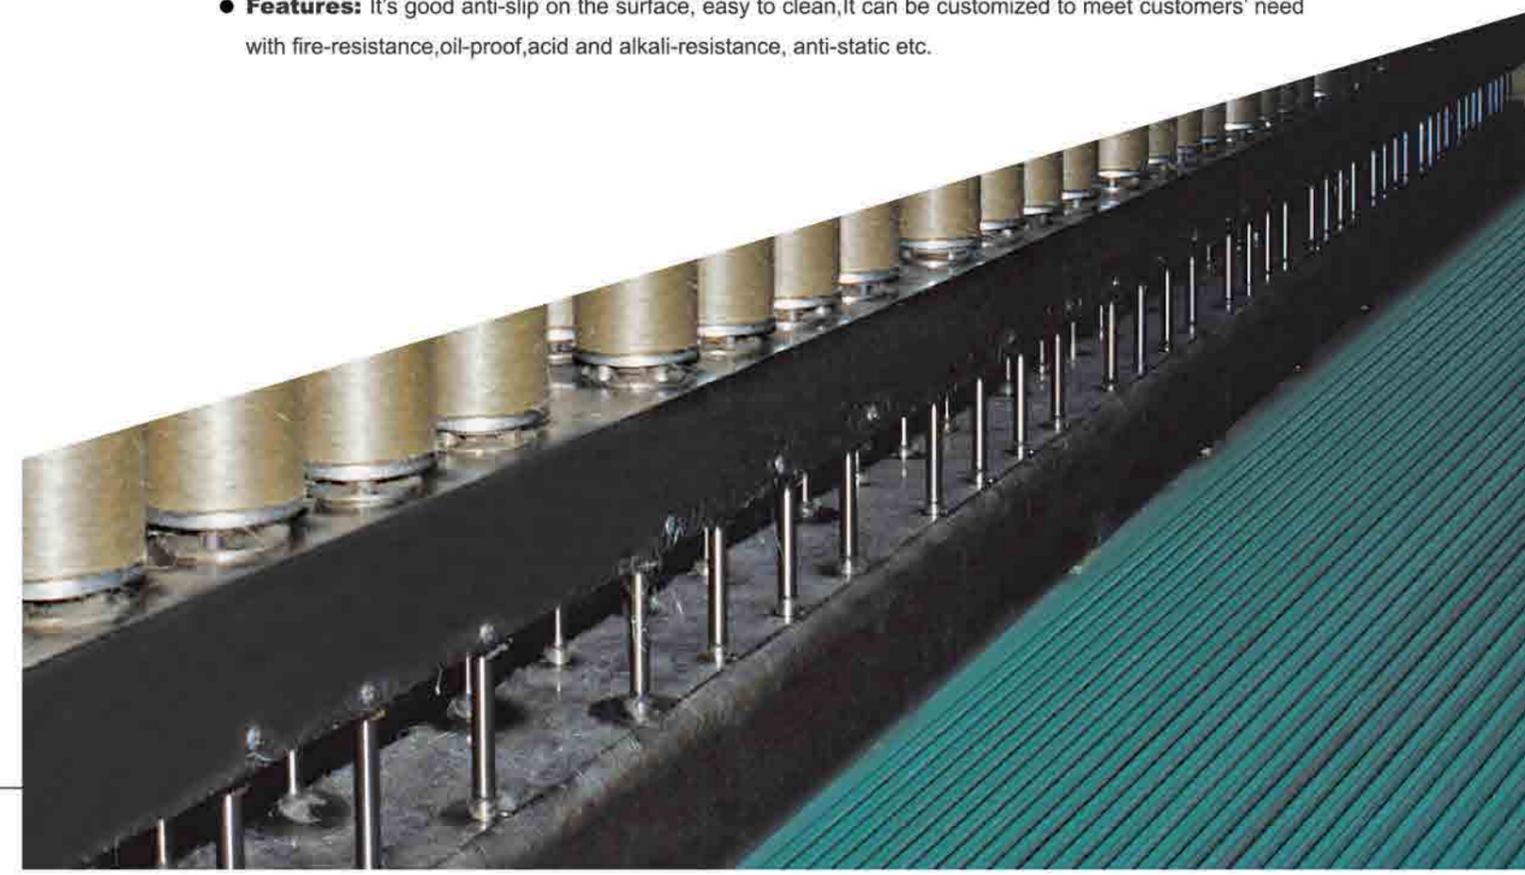

ANTI-SLIP RUBBER SHEET ROLL

地面防滑类橡胶板



ANTI-SLIP RUBBER SHEET ROLL

地面防滑类橡胶板

可选颜色 Available color



正面 Top



背面 Bottom

GS0421 1m*10m*17mm (39"x32.8"x0.67") 19KG/M

可选颜色 Available color



GS0500 1-1.5m*10m*1-25mm
(3.28'-4.29'x32.8'x0.04"-0.98")

邵氏硬度 (shore hardness) : 65±5°
拉伸强度 (Tensile Strength) : 3.0—8.5MPa
伸长率 (Elongation) : 150%—600%



GS0501 1m*10m*3-5mm (3.28'x32.8'x0.12"-0.2")

可选颜色 Available color



可选颜色 Available color



GS0502 1m*10m*3mm (3.28'x32.8'x0.12")



可选颜色 Available color




GS0503 1-1.5m*10m*3-5mm (3.28'-4.92'x32.8'x0.12"-0.2")






ANTI-SLIP RUBBER SHEET ROLL

地面防滑类橡胶板

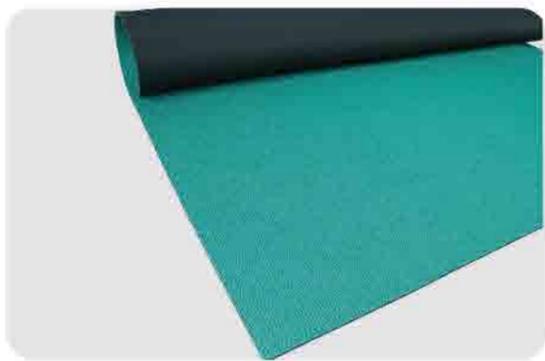

可选颜色 Available color

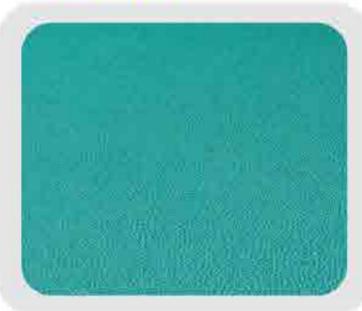


GS0504 1-1.5m*10m*3-5mm (3.28'-4.92'x32.8'x0.12"-0.2")



可选颜色 Available color




GS0505 1-1.4m*10m*5-7mm (3.28'-4.6'x32.8'x0.2"-0.28")

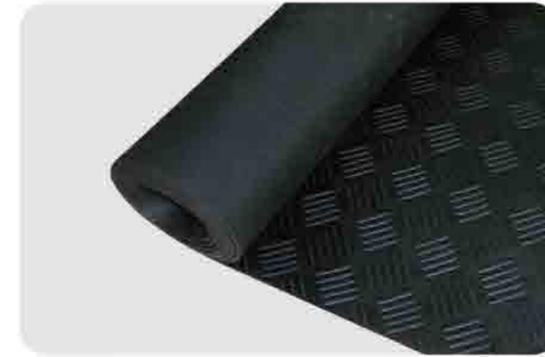

可选颜色 Available color



GS0507 1-1.4m*10m*3-5mm (3.28'-4.6'x32.8'x0.12"-0.2")

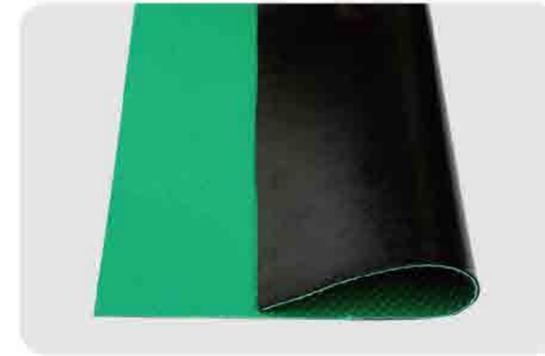

可选颜色 Available color



GS0508 1m*10m*3-5mm (3.28'x32.8'x0.12"-0.2")



可选颜色 Available color



GS0509 1m*10m*3-5mm (3.28'x32.8'x0.12"-0.2")



可选颜色 Available color



GS0510 1-1.5m*10m*1.0-20m (3.28'-4.92'x32.8'x0.04"-0.79")



RUBBER FLOOR/ TILE/PAVER 橡胶地板

学校、医院、公园、机场、地铁、儿童游乐场、体育场馆、健身中心、养老院等橡胶地板。

The rubber flooring is appropriate for paving on school, hospital, park, airport, subway, children's playground, sports area, gymnasium, nursing home etc.

- **材质:** (天然环保橡胶/XPE/PVC)
- **用途:** 片材类产品适合各种场合的安装;卷材类产品方便大面积铺装。
- **特点:** 吸音耐腐蚀, 环保无异味, 使用年限长, 色彩鲜艳、美观、隔音、耐磨、防滑效果好, 易清洁, 干净卫生, 环保无异味。
- **Material:** (Natural eco-friendly rubber /XPE/PVC)
- **Application:** Rubber sheet is suitable for various occasions installation; Rubber floor rolls are suitable for large area pavement.
- **Features:** Sound absorption and corrosion resistant eco-friendly without odor and long service life, bright color, beautiful, sound insulation, abrasion-resistant, anti slip effect, easy to clean, clean and healthy and echo-friendly without odor.




GF0600A/B



正面 Top

型号 Item	尺寸 Size
GF0600A	1000*1000*3-6mm (39.3"x39.3"x0.1"-0.24")
GF0600B	1-1.5m*20m*2.5-6mm (39.3"-59"x65.6"x0.1"-0.24")

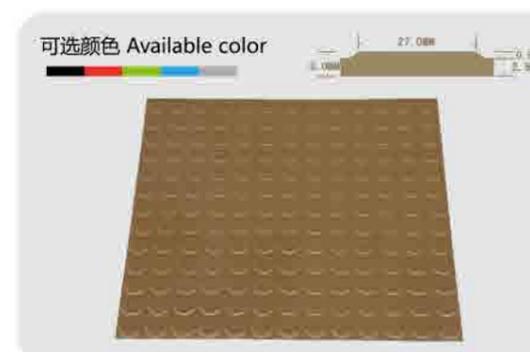

GF0601A/B/C



正面 Top

型号 Item	尺寸 Size
GF0601A	500*500*2.5-6mm(19.6"x19.6"x0.1"-0.24")
GF0601B	600*600*2.5-6mm(23.6"x23.6"x0.1"-0.24")
GF0601C	1000*1000*2.5-6mm (39.3"x39.3"x0.1"-0.24")




GS0503




正面 Top

型号 Item	尺寸 Size
GS0503	1-1.5m*10m*3-5mm (3.28'-4.92'x32.8'x0.12"-0.2")

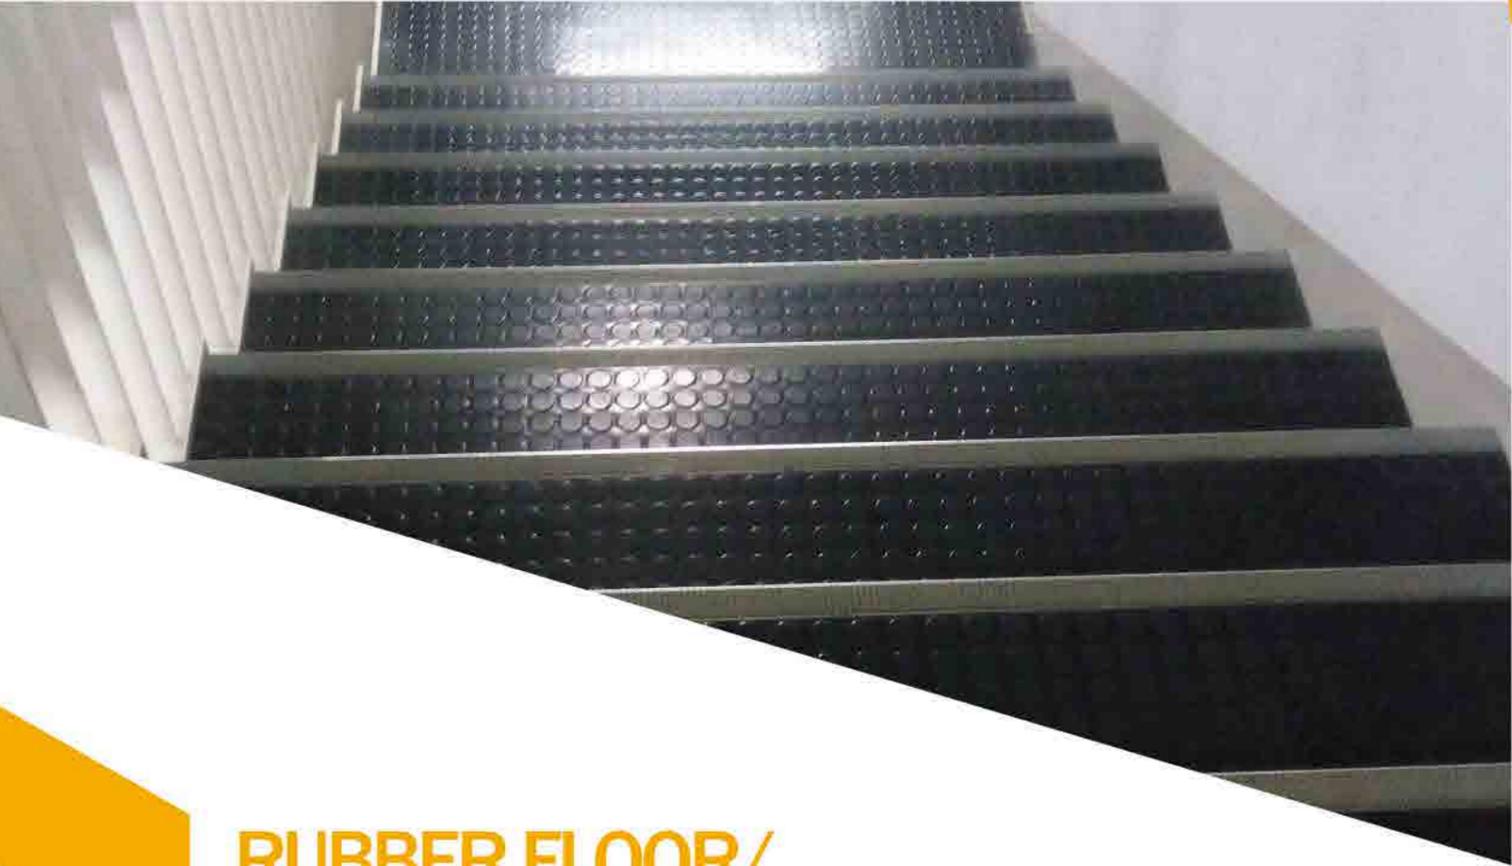


RUBBER FLOOR/ TILE/PAVER 橡胶地板

楼梯踏步 Rubber Stair Treads

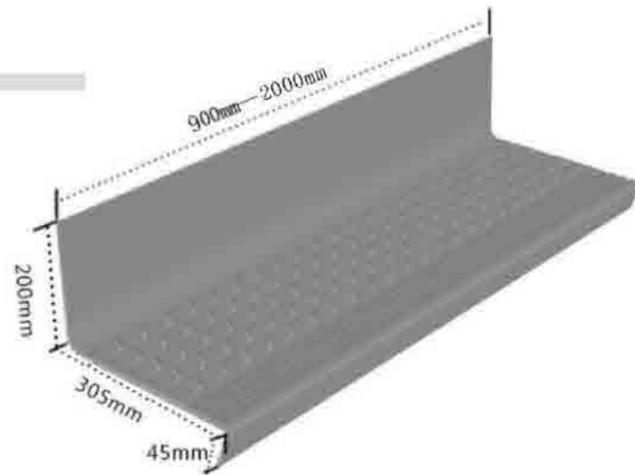

可选颜色 Available color

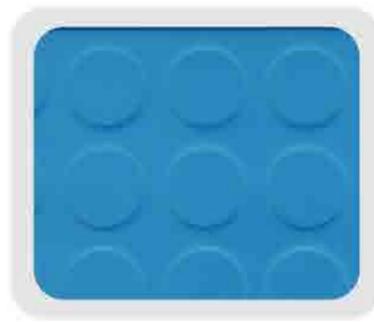


正面 Top

GF0610 1m-2m*500mm*5mm(39.3"-78.7"x19.6"x0.2")

RUBBER FLOOR/ TILE/PAVER 橡胶地板

锤击纹橡胶地板 Hammer Blow Surface rubber flooring

可选颜色 Available color

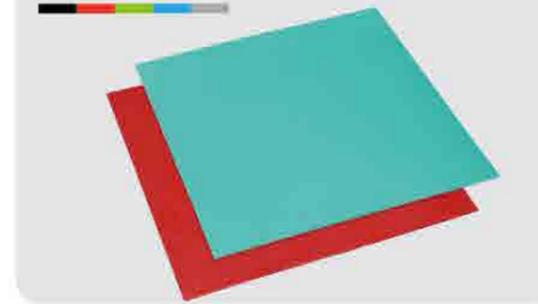


正面 Top

GF0603 600*600*2.5-6mm(23.6"x23.6"x0.1"-0.24")

抗疲劳发泡厨房垫 Kitchen anti-fatigue foam

可选颜色 Available color

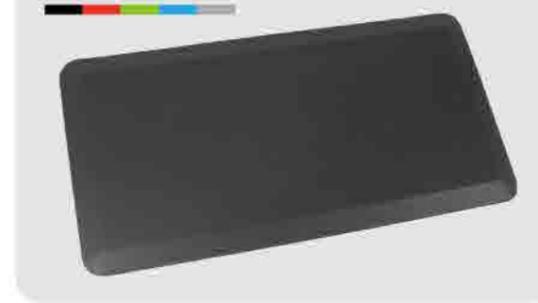

正面 Top

GM0403 990*490*19mm (38.98"x19.29"x0.75") 1.8KG/PC



RUBBER FLOOR/ TILE/PAVER 橡胶地板

EVA弹性地板 EVA floor



可选颜色 Available color



正面 Top

GE0420A 1000*1000*20/25/30/40/50mm (39.3"x39.3"x0.79"/0.98"/1.18"/1.57"/1.97")

可选颜色 Available color

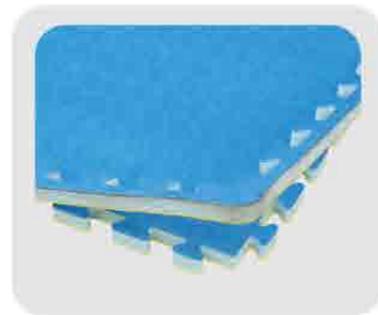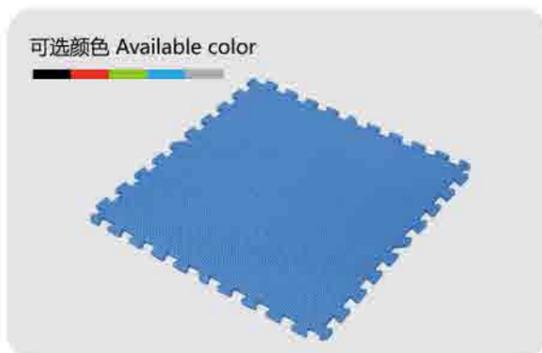

正面 Top

GE0423 600*600*12/15/20/25/30/40mm(23.6"x23.6"x0.47"/0.6"/0.79"/0.98"/1.18"/1.57")

EVA瑜伽垫 EVA Yoga Mat

可选颜色 Available color



正面 Top

GE0420B 1.72m*0.61m*4mm(5.64'x2'x0.39"-0.16")

TPE 瑜伽垫 TPE Yoga Mat

可选颜色 Available color



正面 Top


GE0424 1.83m*0.61m*6mm (6'x2'x0.24")



RUBBER FLOOR/ TILE/PAVER 橡胶地板

施工简介 Construction Profile:

- 水泥地面要求干燥，平整，无裂缝，无油污，最好预先铺设自流平。
- 木质地面要求致密平整。
- 铺装前应保证地板颜色和批号是否一致。
- 地板应在施工现场放置24小时以上，以保证现场温度在15-25摄氏度之间。
- 依产品及环境温度涂抹（单）双组分胶粘剂或万能强力胶。
- 铺设片材之间应紧贴无缝隙，保持板面平整无污染。
- 按使用胶水的固化时间不同，一般需24-36小时保持地板闲置不动。
- 清洗一般用适量水份擦拭即可，油污情况采用中性洗涤剂清除。
- Please make the ground flat,solid and no crack. The unsatisfactory ground can be paved with self-leveling in advance.
- The wooden floor should not be crack.
- Please check if the color and batch number is consistent before paving.
- The rubber floor should be delivered to construction site and stored more than 24 hours , to guarantee the temperature is between 15°C and 25°C at construction site.
- Please paint single component adhesive or all-purpose adhesive according to temperature and different products.
- Make sure there is no gap for the rubber floor paved and keep the floor flap without pollution.
- Please keep the floor immovability for 24-36 hours according to different curing time of glue.
- You can use neutral detergent to clean the grease, otherwise, you can only use water to clean.

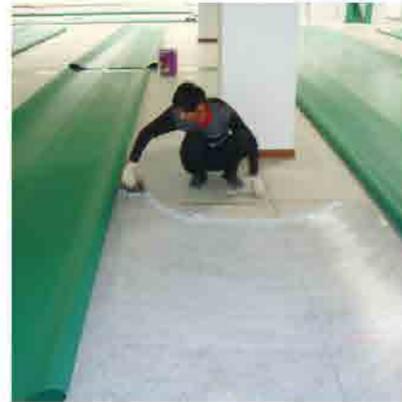

RUBBER FLOOR/ TILE/PAVER 橡胶地板



正面 Top

GT0100 200*160*23/43.5/45mm (7.87"x6.3"x0.9"/1.71"/1.77")



正面 Top

GT0102 607*593.5*15/19/23mm(23.9"x23.37"x0.59"/0.74"/0.9")

物性 Characteristics	测试规范 Standards	测试值 Test Results	
		圆浮点系列 Dot rubber floor series	锤击纹系列 Hammer Blow Series surface Floor
防火性 Fire Behavior	ASTM E648	一级 CLASS 1	一级 CLASS 1
NBS 烟浓度 Smoke Density	防火性 Fire Behavior	< 450	< 450
耐磨耗性 Abrasion	ASTM D4060 CNS 6988	< 1.7g	< 0.9g
尺寸安定性 Dimensional Stability	ASTM D1204 CNS 10146	< 0.1%	< 0.1%
拉伸强度 Tensile Strength	ASTM D412 CNS 3553	> 62kgf/c㎡	> 75kgf/c㎡
防滑性 Skid resistance	ATM-D2047 干式 Dry Mode	0.86	0.88
断裂伸长率 Crack Tensile Strength	CNS 3553	220%	410%
耐酸碱性 Acid And Alkali Resistance	3%醋酸 3%NaOH 室温48hr.	无异状 No Abnormal	
耐烟灼性 Cigarette Burn Resistance	DIN 51961	表面无燃烧现象 No Burning	





RUBBER FLOOR/ TILE/PAVER

橡胶地板

可选颜色 Available color



正面 Top

GT0103 1100*1100*15/20/25mm(43.3"×43.3"×0.59"/0.79"/0.98")

可选颜色 Available color



正面 Top

GT0201 300×300×10/15/20/23/25/30mm
(11.8"×11.8"×0.39"/0.59"/0.79"/0.9"/0.98"/1.18")

可选颜色 Available color



正面 Top



背面 Bottom

GT0200A/GT0203A

型号 Item	尺寸 Size
GT0200A	500*500*15mm/20mm/25mm/30mm(19.68"x19.68"x0.59"/0.79"/0.98"/1.18")
GT0203A	1000*1000*10mm/15mm/20mm/25mm/30mm(39.3"x39.37"x0.39"/0.78"/0.98"/1.18")

可选颜色 Available color



正面 Top

GT0200B/GT0203B

型号 Item	尺寸 Size
GT0200B	500*500*15mm/20mm/25mm/30mm(19.68"x19.68"x0.59"/0.79"/0.98"/1.18")
GT0203B	1000*1000*10mm/15mm/20mm/25mm/30mm(39.3"x39.3"x0.39"/0.59"/0.79"/0.98"/1.18")

可选颜色 Available color




正面 Top

GT0202/GT0310

型号 Item	尺寸 Size
GT0202	305*305*23/45mm(1'x1'x0.9"/1.78") 2KG/PC 3.4KG/PC
GT0310	400x400x30mm(15.7"x15.7"x1.2") 4KG/PC



RUBBER FLOOR/ TILE/PAVER 橡胶地板

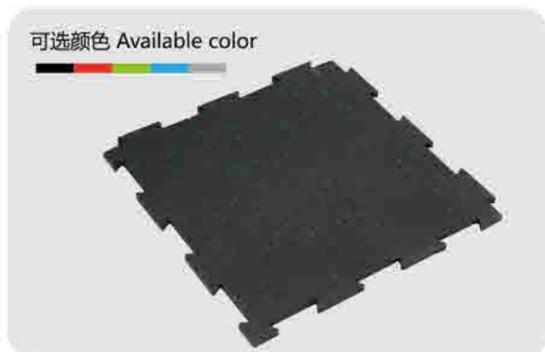


正面 Top

GT0312 500*500*8-25mm(19.6"x19.6"x0.31"-0.98")



正面 Top

GT0309 300*300*25mm(11.8"x11.8"x0.98") 2.3KG/PC

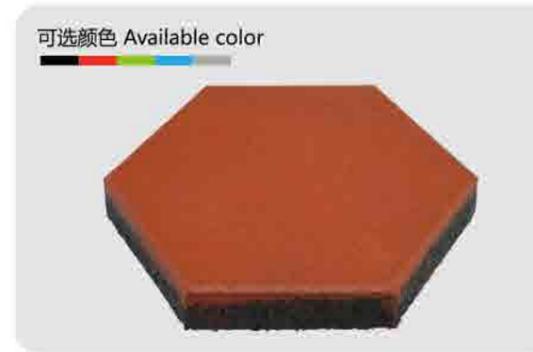

正面 Top

GT0300 305*305*23/45mm(1'x1'x0.91"/1.77") 1.85KG/PC 3.8KG/PC



正面 Top

GT0301 589*515.75*19/23mm(23.2"x20.3"x0.75"/0.9") 4.5KG/PC 4.8KG/PC



正面 Top

GT0302 596*508*19/23mm(23.5"x20"x0.75"/0.9") 4.5KG/PC 5.8KG/PC




正面 Top

GT0303 456*456*23mm(18"x18"x0.9") 4.2KG/PC



RUBBER FLOOR/ TILE/PAVER

橡胶地板

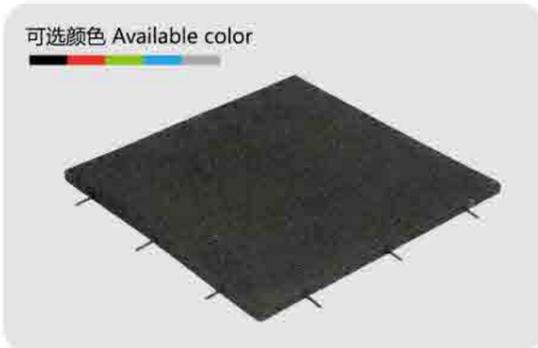

正面 Top

GT0204 610*610*13/25mm (2'x 2'x 0.5"/0.98") 4.9KG/PC 8.8KG/PC




边缘 Edge



背面 Bottom

GT0205 500*500*40/45mm(19.7"x19.7"x1.6"/1.8") 9KG/PC 9.5KG/PC

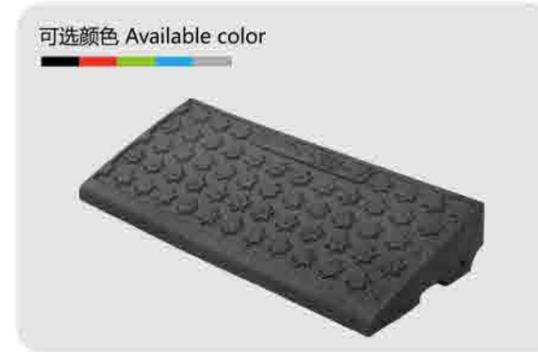

正面 Top

GT0313 600*260*100mm(23.6"x10.2"x3.9") 8.2KG/PC



正面 Top

GT0314 456*456*20mm(17.9"x17.9"x0.8") 4KG/PC



GT0315 1000mm*220mm*52mm (39.37"×8.66"×2.05") 6.5KG/PC
220mm*220mm*50mm (8.66"×8.66"×1.97") 0.8KG/PC





RUBBER FLOOR/ TILE/PAVER 橡胶地板

可选颜色 Available color



GT0304 1220×127×51/76mm(4'x5"x2"/3") 7.5KG/PC 17KG/PC



边缘 Edge

可选颜色 Available color



GT0305 1830*101*76mm(6'x4"x3")12.4KG/PC 1220*101*76mm(4'x4"x3")8.2KG/PC



边缘 Edge



可选颜色 Available color



正面 Top

GT0306 1220*140*51mm(4'x5.5"x2") 7.8KG/PC

黑色SBR颗粒+EPDM彩色颗粒, 可根据客户要求定做不同密度的表面撒花图案。
Black SBR grain + EPDM colorful grain, it can be customized to the different density flecked pattern according to the request.



GF0606 600-1250mm*30m*3-12mm (23.62"-49.21"X98.43'x0.12"-0.47")



RUBBER STABLE MAT FOR ANIMALS 畜牧类橡胶垫

奶牛卧床通道、马厩、猪场、鸡舍等畜牧场所。

It is very popular to use in cow bed passage, horse stables, piggery, pheasantry and so on.

- **材质:** 环保合成橡胶。
- **用途:** 畜牧场所地面防潮、防滑。
- **特点:** 高强度无异味环保橡胶, 表面图案凸起防滑, 防止意外滑倒造成的伤害, 冬季有良好的保温效果, 使用在畜牧场所时可有效减缓其腿部压力, 防止意外滑到造成的伤害。
- **Material:** Environmental protection synthetic rubber.
- **Application:** It's moistureproof and skid resistant for animal husbandry places.
- **Features:** High strength without smell eco-friendly rubber, non slip surface pattern, prevent accidental slips and injuries. It also has a good heat preservation effect in cold day. When used in animal husbandry, the rubber mat can effectively reduce the pressure for the livestock's leg and prevent accidental slips and injuries. It can be customized to meet customers' need with heating style pigsty and cow stable mat.

RUBBER FLOOR/ TILE/PAVER 橡胶地板

高尔夫球垫 Golf Mat

用途: 环保橡胶颗粒包边, 中间为柔软舒适的人工草坪。防滑、耐磨, 美观度好。


Application: Environmental friendly rubber grain edge, soft artificial turf in the middle. Anti-skidding, wear-resisting, beautiful appearance.

可选颜色 Available color



GR0707 830*500*25mm(32.7"x19.7"x0.98") 4.7KG/PC



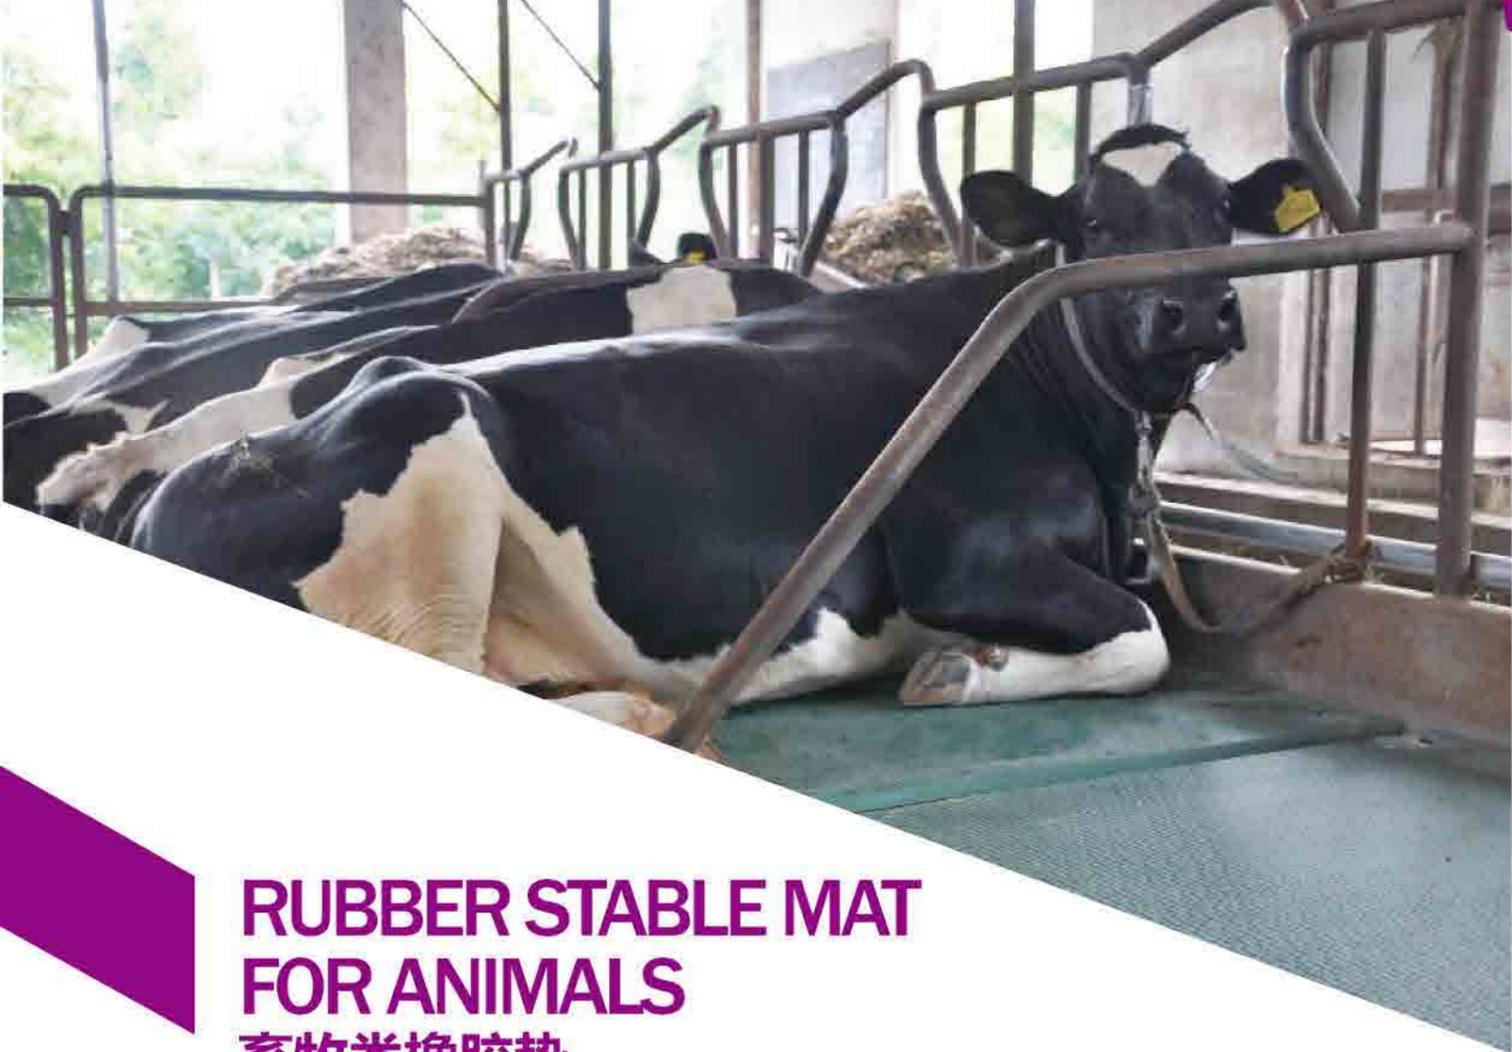

RUBBER STABLE MAT FOR ANIMALS

畜牧类橡胶垫

RUBBER STABLE MAT FOR ANIMALS

畜牧类橡胶垫



正面 Top



背面 Bottom

GM0420/GM0423

型号 Item	尺寸 Size
GM0420	2m*1m*10mm/15mm/17mm/20mm(78.7"x39.3"x0.39"/0.59"/0.67"/0.78")
GM0423	1000*1000*22mm((39.3"x39.3"x0.87") 32KG/PC



正面 Top



背面 Bottom

GE0421 EVA 1830*1220*10/16/20/24mm(6'x4'x0.4"/0.6"/0.78"/0.94")
762*508*12.8mm(30"x20"x1/2")



正面 Top



背面 Bottom

GM0424 1830*1220*18mm(6'x4'x0.7") 42KG/PC



正面 Top




背面 Bottom

GM0421A

型号 Item	尺寸 Size
GM0421A	1830*1220*10mm/12mm/15mm/17mm(6'x4'x0.39"/0.47"/0.59"/0.67")

RUBBER STABLE MAT FOR ANIMALS 畜牧类橡胶垫

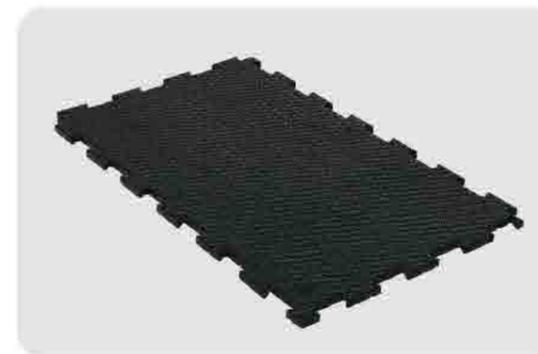

正面 Top



背面 Bottom

GM0425 1205*723*24mm(47.4"x28.5"x0.94") 24KG/PC

龟背纹通道/牛卧床橡胶垫卷材 Tortoiseshell pattern channel/cow bed rubber sheet roll




正面 Top



背面 Bottom

GS0506 1-2m*20m*8-20mm (3.28'-6.56'x65.6'x0.31"-0.79")

菱形卷材通道/待挤区防滑垫 Diamond-shaped passage/rubber mat for milking parlour

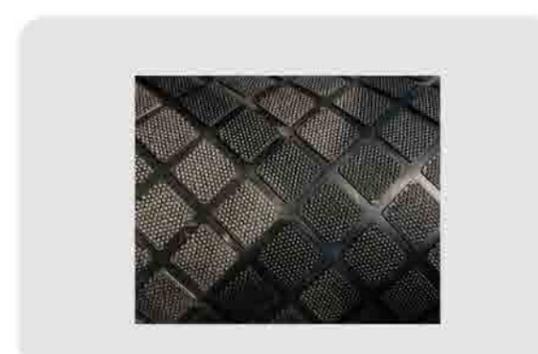

正面 Top



背面 Bottom

GS0514 1-2m*20m*8-20mm (3.28'-6.56'x65.6'x0.31"-0.79")

RUBBER STABLE MAT FOR ANIMALS 畜牧类橡胶垫

海绵橡胶牛卧床 Spongy rubber stable mat

- **用途:** 海绵橡胶牛卧床是采用独特工艺设计而成的特别适合奶牛生活特点的新型卧床。该产品柔软舒服, 表面易清洗, 专用海绵层加超强防水薄膜, 不吸水不滋生细菌。
- **特点:** 龟背纹橡胶 (8毫米厚) + 海绵层 (30毫米厚), 在保证牛卧床防滑耐磨的基本要求同时, 极大提高奶牛卧床舒适性。
- **Application:** It's made of special technological design and suitable for dairy cattle's character. It's soft and comfortable, easy to clean, the sponge is added waterproof membrane, no absorbing water and no bacterium.
- **Features:** Tortoiseshell pattern rubber (8mm) + spongy(30mm), it improve the comfort level for dairy cattle.



ROAD TRAFFIC SAFETY FACILITIES 安全防护类橡胶垫



RUBBER STABLE MAT FOR ANIMALS 畜牧类橡胶垫



GM0426 960*585*18mm(37.8"x23"x0.7") 15KG/PC



GM0427 770*370*17mm(30.3"x14.6"x0.67") 4.3KG/PC

猪舍防滑垫/母猪产床电加热保温系列 Rubber mat for hog house/heating rubber mat for obstetric table of sow



正面 Top




温控器 Temperature controller

GM0440

型号 Item	尺寸 Size
GM0440	1m*1m*10-17mm (3.28'x3.28'x0.39"-0.67")
	1.83m*1.22m*10-17mm (6'x4'x0.39"-0.67")
	2m*1m*10mm (6.56'x3.28'x0.39")

橡胶底座 Rubber Base

- 用途：配套用颗粒橡胶材质底座，承托各种设备零件等。
- 产品特点：室外专用耐老化弹性橡胶，根据不同结构设计，有效承托重量最大可达500公斤以上。
- Application: The pedestal is made of rubber granule used for all kinds of equipments and parts.
- Features: Special anti-aging elastic rubber for outdoor, the max weight capacity is above 500 kilograms according to the different design.

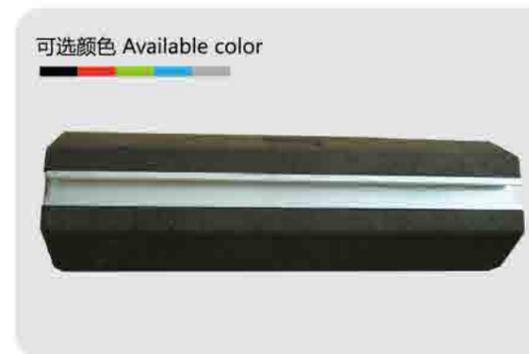

可选颜色 Available color



背面 Bottom

GTFX250/GTFX400/GTFX600/GTFX1000

型号 Item	尺寸 Size
GTFX250	250mm*185mm*100mm (9.84"x7.28"x3.94")
GTFX400	400mm*185mm*100mm (15.75"x7.28"x3.94")
GTFX600	600mm*185mm*100mm (23.62"x7.28"x3.94")
GTFX1000	1000mm*185mm*100mm (39.37"x7.28"x3.94")

PU轮 PU wheel




可选颜色 Available color

GP0801

胶粘剂 PU adhesive



GR0708

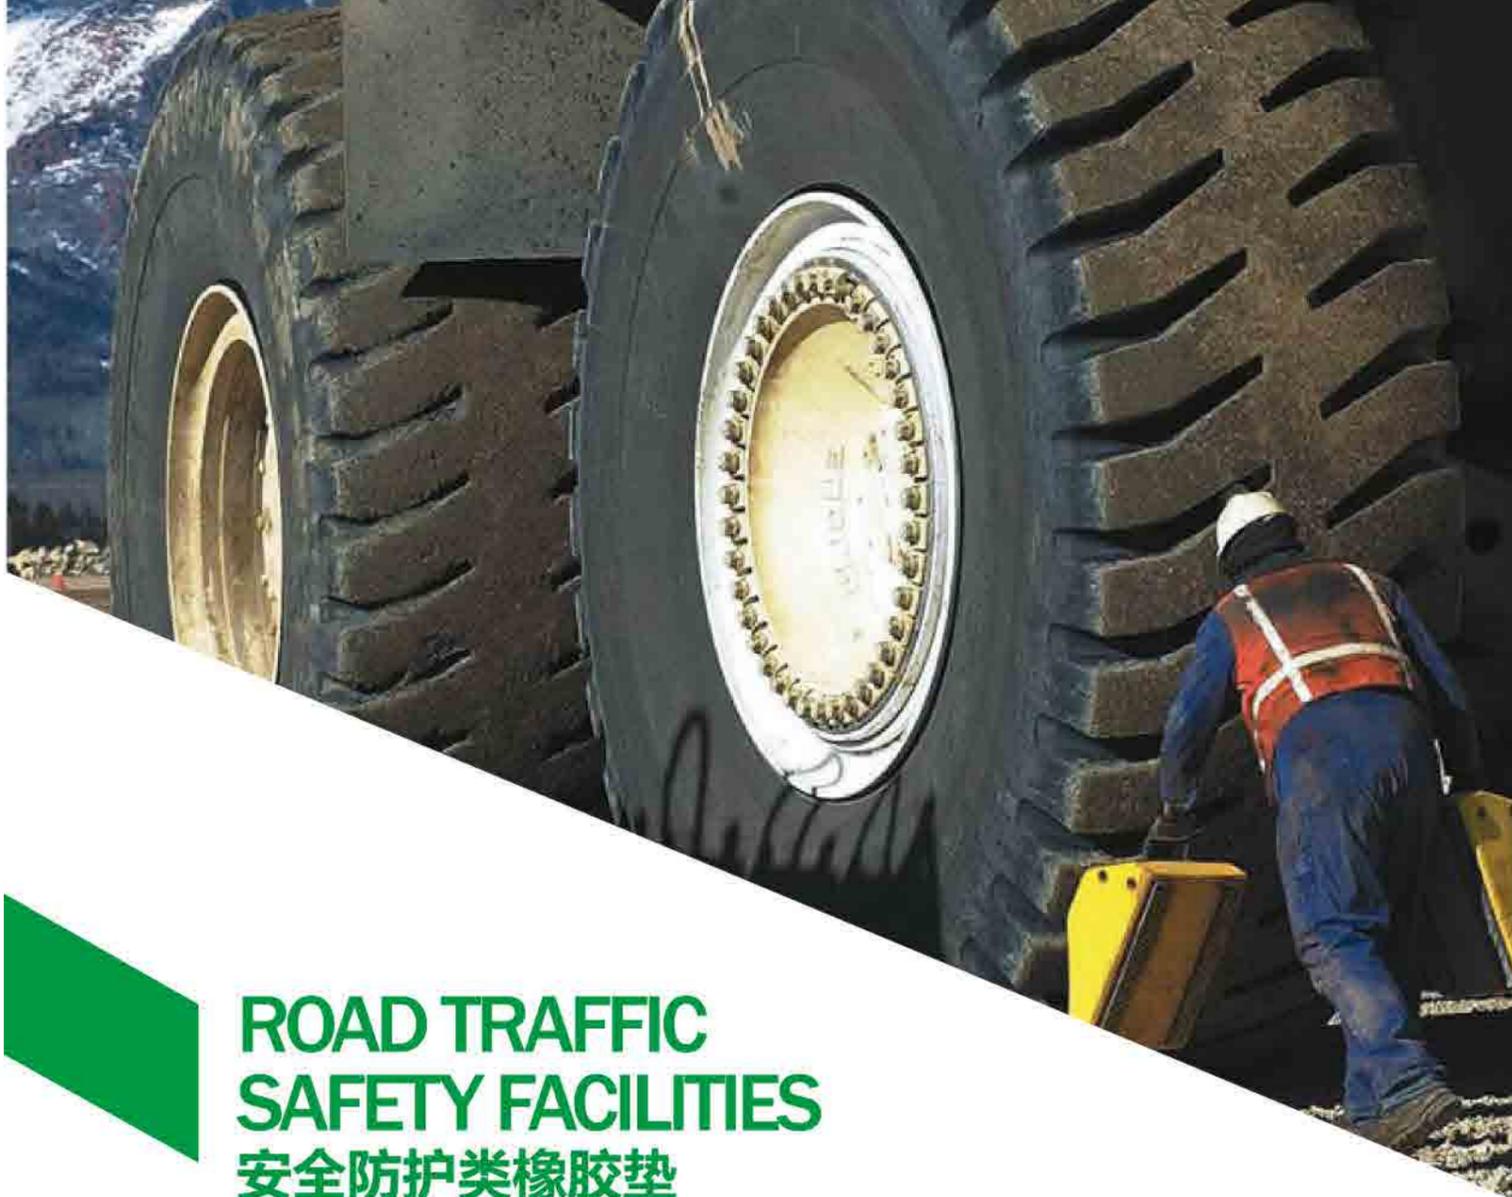


ROAD TRAFFIC SAFETY FACILITIES 安全防护类橡胶垫

道路施工防护，交通配套设施，停车场，特种安全标识。
Road construction protection, traffic facilities, parking lot, special security identification.

挡车块 Buffer block/rubber wedge

- **用途：**防止车辆停止时意外滑动，辅助刹车。
- **特点：**环保无异味橡胶材质，防撞、缓冲及防滑效果好，结实耐用；提手和提绳设计，携带搬运更方便，还可以定做聚氨酯材质和塑料材质的款式。
- **Application:** Protecting vehicles from slide when we park our cars, auxiliary brake.
- **Features:** The material of the buffer block is made of environmental rubber without odor, it has a good effect of anti-collision, buffer, anti-slip and durable. With the design of lifting handle and handle rope, it is easy to carry. It can be customized to meet customers' need with polyurethane & plastics material.

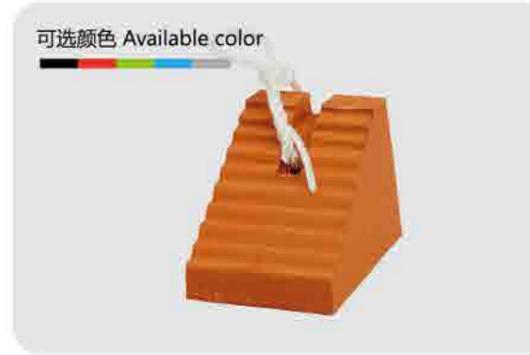

GR0704A/GR0704B



背面 Back

型号 Item	尺寸 Size
GR0704A	170*95*100mm(6.7"x3.7"x3.9") 1.6KG/PC
GR0704B	240*160*170mm(9.4"x6.3"x6.7") 5.84KG/PC



GR0703A/GR0703B/GR0703C



侧面 Side

型号 Item	尺寸 Size
GR0703A	200*105*150mm(7.8"x4.1"x5.9") 2KG/PC
GR0703B	197*93*153mm (7.8"x3.66"x6") 2KG/PC
GR0703C	265*118*180mm(10.4"x4.6"x7.1") 3KG/PC

PU发泡 Material:PU Foam



GR0711A /GR0711B



背面 Back

型号 Item	尺寸 Size
GR0711A	335*190*350mm(13.2"x7.48"x13.78") 3.3KG/PC
GR0711B	570*300*300mm(22.44"x11.8"x11.8") 13.7KG/PC



ROAD TRAFFIC SAFETY FACILITIES 安全防护类橡胶垫

减速带 Rubber deceleration strip

- **用途:** 学校、医院、政府机构等公共性场所周围道路警示及减速用。
- **产品特点:** 橡胶减速带耐磨、抗老化，表面彩色有极好的警示效果，有效降低车辆通过的速度。
- **Application:** Rubber Deceleration strip is used on road and street, in public place such as school, hospital, government etc.
- **Features:** It is wear resistant and anti-aging, its colorful surface does well in warning, so it can reduce the speed effectively when the vehicles go through it.



GR0715A/GR0715B

型号 Item	尺寸 Size
GR0715A	505-540*350*48mm (19.8"-21.2"x13.8"x1.9")
GR0715B	248*285*350*48mm (9.8"x11.2"x13.8"x1.9")

EVA反光护角 EVA reflective corner

- **用途:** 收费通道、停车场隔墙、墙角及柱角，在光线不佳或夜晚更能引起驾车者的注意，提高安全性。
- **产品特点:** EVA发泡塑料吹塑而成，配贴白色反光膜，护角条具有耐腐蚀、抗冲击、防老化。增强了墙角的抗冲击性，保持墙角的长期美观而不被破坏。
- **Application:** It can be used in toll station, Parking lot, the corn of wall and the corn of column. EVA reflective corner can attract the attention of the driver when they drive at night with poor light. Also, it can improve the safety of driving.
- **Features:** EVA reflective corner is made of EVA Foamed material and stuck with white tapetum lucidum on the surface. It is anti-corrosion, impact resistance and anti-aging. It can improve the impact resistance of the corn of wall and protecting wall from destroy.



GR0717 800*100*7mm(31.5"x3.93"x0.27")

卡车垫 Truck bed mat

- **用途:** 卡车垫可以保护您的卡车底盘，车间或拖车的划痕，凹痕和泄漏。
- **产品特点:** 具有高强度，能够使车斗抵御溅出的化学物质腐蚀而不开裂、生锈、损坏。
- **Application:** It can protect your truck bed, workshop or trailer from scratches, dings, dents and spills.
- **Features:** High-strength, the truck bed mat can resist most of chemical spills and prevent the truck bed from crack, rust or break.



GR0503

型号 Item	尺寸 Size
GR0503	1410*1940*3/5/7mm(4.63'x6.36'x0.12"/0.2"/0.28")
	1400*2000*3/5/7mm(4.6'x6.56'x0.12"/0.2"/0.28")
	1350*2000*3/5/7mm(4.43'x6.56'x0.12"/0.2"/0.28")



ROAD TRAFFIC SAFETY FACILITIES 安全防护类橡胶垫

步行者通道防滑橡胶板 Foot passenger passway non slip rubber sheet

- **用途:** 地铁、景区、公园及其他特殊场所道路路口警示用防滑橡胶板。
- **产品特点:** 材料为高强度环保橡胶，防滑耐磨性好，色彩鲜明具有指路及警示性作用。
- **Application:** The subway, scenic spot, park and non slip rubber plate for warning of road crossing in special place.
- **Features:** Material is high strength eco-friendly rubber, Good slip resistance and abrasion resistant, Bright color with the role of guiding and warning.



GS0512



GS0511



GS0511

型号 Item	尺寸 Size	重量 Weight
GS0511	0.6m*3.6m*3mm(1.97'x11.8'x0.12")	10KG/PC
GS0512	0.6m*3.6m*4mm(1.97'x11.8'x0.16")	12KG/PC

路标垫 Road sign pad

- **用途:** 用于城市路口车道、高速公路养护、社区、酒店、体育场所、危险地区及道路施工地段等。
- **产品特点:** 具有良好的柔韧性、抗汽车滚压、硬物撞击不易损坏，良好的抗老化性能，耐热、耐寒、不龟裂等优点。
- **Application:** For urban intersection Lane, Highway maintenance, community, hotel, Sports place Hazardous area and road construction site, etc.
- **Features:** Have good flexibility, Anti vehicle rolling, Hard object impact is not easy to damage, Good aging resistance, heat resistant, cold resistant, no cracks and other advantages.



GR0700A/GR0700B




背面 Bottom


型号 Item	重量 Weight
GR0700A	2KG/PC
GR0700B	3KG/PC

橡胶电缆防护套 Rubber cable coupling

- **用途:** 保护电缆在车辆通过时的安全，远离化学及其他污染物质的腐蚀。
- **产品特点:** 材料为高强度环保橡胶，安全不导电；耐腐蚀、抗老化；可根据客户的要求长度进行剪裁。
- **Application:** Protecting cables from the traffic and preventing cables from the Corrosion of the chemical or any contaminant.
- **Features:** The material of the cable is an environmental rubber with high strength; non-conducting, anti-corrosion, anti-aging; It can be cut according to your requirement.

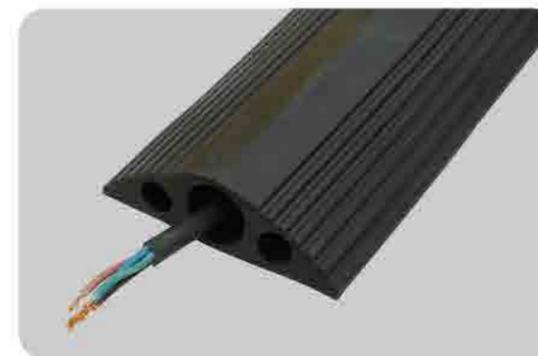

GR0702A

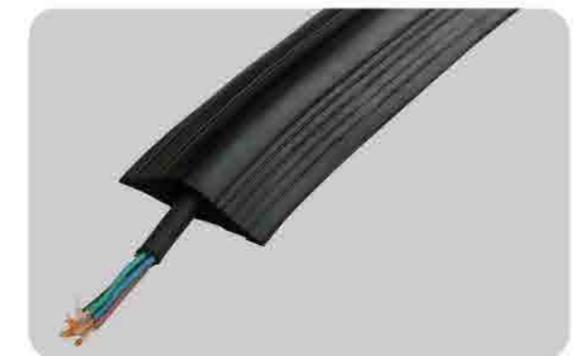

GR0702B

型号 Item	尺寸 Size
GR0702A	4m*160mm*50mm(13'x6.3"x1.97") 19KG/ROLL 孔Φ40
GR0702B	10m*100mm*30mm(32.8'x3.94"x1.18") 19KG/ROLL 孔Φ20

ROAD TRAFFIC SAFETY FACILITIES 安全防护类橡胶垫

挡泥板 Rubber mud guard




GR0719 609.6*609.6*7mm(24"x24"x1/4")
609.6*762*7mm(24"x30"x1/4")

橡胶路沿踏板 Rubber ramp



GR0718A

背面 Bottom

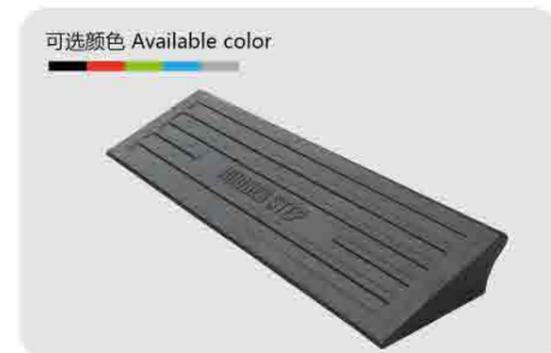

GR0718B

背面 Bottom

型号 Item	尺寸 Size
GR0718A	600*200*45mm(23.6"x7.87"x1.77") 4KG/PC
GR0718B	600*250*95mm(23.62"x9.84"x3.74") 8KG/PC

THE ENVIRONMENT PROTECTION OIL SPILL CONTROL EQUIPMENT 环保溢油设备

船舶油污处理、河海溢油防治系列围油栏、收油机、吸油毡、消油剂等产品。
The environment protection oil spill control equipment.

充气式橡胶围油栏 Inflatable Rubber Boom

- **用途:** 河流、海洋垃圾围堵, 海域溢油防护处理, 船舶油污定点围控专用产品。
- **特点:** 采用两层高强度纤维布做骨架, 外敷优质合成橡胶、耐油、耐磨、耐海水腐蚀、耐紫外线老化。专门设计的气阀, 充气迅速快捷, 气密性好。配套液压动力站、充气机、带刹车的液压驱动卷绕架固定在集装箱内, 集装箱前后开门, 便于操作。



- **Application:** Rubber oil boom can be used to prevent the pollution from oil, rubbish in the river, sea etc.
- **Features:** Two layers of high-strength fiber cloth coated with super-quality synthetic rubber on its outer surface are used as its base, featuring good resistance to oil, abrasion, corrosion due to seawater and aging from ultraviolet radiation. Specially designed air valves with capabilities of fast inflation and excellent air tightness. Hydraulic power pack, inflating & deflating machine and hydraulically driven boom reel with braking device installed in a container with front and rear doors for ease of operation.

型号 Model	GB800 RA	GB1000 RA	GB1200 RA	GB1500 RA	GB1800 RA	GB2000 RA	GB2600 RA
总高度 (mm) Overall height	800	1000	1200	1500	1800	2000	2600
干舷 (mm) Free board	280	360	400	500	560	600	810
吃水 (mm) Draft	370	430	590	780	950	1100	1400
每节长度 (m) length per section	100/200						
允许工作拉力 (KN) Max. working tensile strength	110	140	170	190	230	260	280
最大抗波高 (m) Max. wave height to withstand	2	2	2.5	3	3	4	4
最大抗风速 (m/s) Max. wind speed to withstand	15	15	20	20	20	25	25
最强季风速 (m/s) Max. current speed to withstand	2~3	3	3~4	3~4	3~4	3~4	3~4
集装箱尺 (mm) Dimensions of container	2700*2200*2200	2700*2900*2200	3200*2200*2200	3500*2200*2200	4100*2200*2200	4300*2200*2200	5200*2200*2200



THE ENVIRONMENT PROTECTION OIL SPILL CONTROL EQUIPMENT 环保溢油设备

固体浮子式橡胶围油栏 Solid Float Rubber Boom

- **用途:** 河流、海洋垃圾围堵，海域溢油防护处理，船舶油污水定点围控专用产品。
- **特点:** 橡胶材质的围油栏耐气候性高，易储存及使用寿命长，根据需要使用的场所、用途，可以定做不同材质、内部结构不同的围油栏产品。包括充气式围油栏、固体浮子式围油栏甚至特别定做防火围油栏等。
- **Application:** Rubber oil boom can be used to prevent the pollution from oil, rubbish in the river, sea etc.
- **Features:** Rubber oil boom is made of rubber. It's easy to store, durable and weatherability. We can produce all kinds of material and design oil boom according to customer's various requests. Including inflatable rubber boom, Solid Float rubber boom and Fireproofing boom.



型号 Model 项目Parameter	GB600R	GB800R	GB1000R	GB1200R	GB1400R
总高度(mm)Overall eight	600	800	1000	1200	1400
干舷(mm)Free board	210	280	340	400	460
吃水(mm)Draft	280	360	480	600	700
浮子直径Float diameter	200	280	315	360	420
浮子个数/20m Number of float	22	14	12	12	12
重量(kg/m)Weight	5.0	6.8	9.2	12	13

固体浮子式PVC围油栏 Solid Float PVC Boom

- **用途:** 河流、海洋垃圾围堵，海域溢油防护处理，船舶油污水定点围控专用产品。
- **特点:** PVC围油栏轻便性好，特别适合作为快速应急条件下使用。根据需要使用的场所、用途，可以定做不同材质、内部结构不同的围油栏产品。包括快布放围油栏、固体浮子式围油栏、栅栏式围油栏等。
- **Application:** PVC oil boom can be used to prevent the pollution from oil, rubbish in the river, sea etc.
- **Features:** The PVC oil boom is so light that it's suitable to use for emergency condition. We can produce all kinds of material and design oil boom according to customer's various requests. Including quick laying PVC oil boom, Solid Float rubber boom and Fireproofing boom.



型号 Model 项目Parameter	GB600P	GB700P	GB750P	GB800P	GB900P
总高度(mm)Overall eight	600	700	750	800	900
干舷(mm)Free board	180	260	255	250	330
吃水(mm)Draft	320	400	405	410	540
抗拉强度 (KN) Tensile strength	20	25	30	30	30
浮重比Buoyancy to weight ratio	3.9	5.6	5.2	4.9	6.2
重量(kg/m)Weight	3.7	6.2	6.5	7.1	8.4



THE ENVIRONMENT PROTECTION OIL SPILL CONTROL EQUIPMENT 环保溢油设备

THE ENVIRONMENT PROTECTION OIL SPILL CONTROL EQUIPMENT 环保溢油设备

转盘式收油机 Disc Skimmer

- **用途:** 可广泛用于海洋、河流、湖泊、水池等溢油的回收。
- **特点:** 转盘式收油机是一种耐用、高效的溢油回收设备。选择不同形式的盘片回收各种不同粘度的溢油，主要由液动力站、液压油管、漂浮在水面上的撇油头组成。
- **Application:** The disc skimmer is widely used for recovery of spilled oil on seas, rivers, lakes and ponds.
- **Features:** The disk skimmer is durable and highly efficient oil recovery device. Different types of discs shall be chosen for spilled oil with different viscosity. It is composed mainly of a hydraulic power pack, hydraulic oil piping and skimmer head floating on the water surface.

型号 Model 项目Parameter	GZS-5	GZS-10	GZS-20	GZS-30	GZS-50
回收能力 (mm) Recycle capability	5	10	20	30	50
驱动功率 (KW) Driving power	3~4	3~4	5.5	14	28
动力站重量 (Kg) Weight of power pack	110	140	160	200	320
排油管口径 (mm) Diameter of oil	Φ50	Φ50	Φ65	Φ65	Φ100



消油剂 Oil Spill Dispersant

- **用途:** 主要用于处理海面溢油及清洗油污，是治理海洋石油污染和清洗船舶油污的新型科学必备品。
- **特点:** 学名“溢油分散剂”，是由多种表面活性剂和强渗透性的溶剂组成。作用机理是将水面浮油乳化，形成细小粒子分散于水中，主要适用于开阔海域的溢油处理。
- **Application:** Oil spill dispersant mainly used to deal with the oil spill of the sea and clean the oil stains and is a new scientific essential to manage the marine oil pollution and clean the ship's oil marks.
- **Features:** The scientific name is oil spill dispersant, it is composed of variety of surfactants and solvents with a high permeability.

外观 Appearance	清澈透明 无分成 Clear transparent
PH	7-7.5
燃点°C Kindling point	>70
运动粘度 (mm ² /s) Kinematic viscosity	<50
乳化率 (%) Emulsify efficiency	30s
	10min
鱼类急性毒性 在规定浓度下的半致死时间 (h) Death time	>24
生物降解度BOD5/COD (%) Degree of biodegradation	>30



THE ENVIRONMENT PROTECTION OIL SPILL CONTROL EQUIPMENT 环保溢油设备

THE ENVIRONMENT PROTECTION OIL SPILL CONTROL EQUIPMENT 环保溢油设备

吸油毡 Oil Sorbent Pad

- **用途:** 在溢油应急事件中, 用来有效吸附油污液体并将之留住。
- **特点:** 可生物降解, 环境友好型吸附材料;
吸油速度快, 吸油率高, 吸油量可达自重14倍以上;
持油性好, 被吸收的溢油长时间不滴落;
对环境不会产生二次污染, 填埋易分解, 燃烧含灰量少, 不产生有害气体;
可根据现场需要任意裁剪尺寸。
- **Application:** In the event of an oil spill emergency, which is used to absorb the oil liquid and will retain.
- **Features:** Biodegradation and environment-friendly absorption material.
With fast speed and high rate of oil absorption. The absorption capacity is up to 14 times than its own weight.
With good ability of holding oil and the oil spill will not drip for a long time.
Avoid the secondary pollution to the environment; With easily-decomposed landfill and burned with less ash, do not produce harmful gases.
Be cut in any size according to the requirements.

油品种类 Species	PP-1吸油毡 PP-1 Oil Sorben		PP-2吸油毡 PP-1 Oil Sorben	
	吸油倍数 Oil Absorption rate	油渗透时间 Oil Leakage time	吸油倍数 Oil Absorption rate	油渗透时间 Oil Leakage time
2#主轴油 Cylinder Oil	17	2"	9.7	<1"
轻质柴油 Light Diesel Oil	16.4	3"	9.5	<1"
7#机械油 Machine Oil	16.8	10.2"	10	<1"
20#机械油 Machine Oil	18	50.3"	11.1	5"
11#柴油机油 Diesel Engine Oil	11.51	未吸足 Not enough	12.1	51.3"



吸油拖栏 Towed Oil-absorbing Boom

- **用途:** 可在溢油水面和海滩拦截吸收溢油, 也可拖带清除薄油层, 是回收处理稀薄油层的有效手段之一。
- **特点:** 圆柱状吸油拖栏使用尼龙网带卷装吸油纤维, 中心有拉力绳, 适合在岸滩地区拦截溢油。
- **Application:** It is used to catch and absorb spilled oil and thinner oil slicks on polluted waters and beaches, it is one of effective means for recovery and treatment of thinner layers of spilled oil.
- **Features:** Nylon net with rolled oil-absorbing fibers and pulling cable fastened in the center of cylindrical towed oil-absorbing boom, suitable for retaining and absorbing spilled oil on coastal areas.



型号 Model 项目Parameter	幅宽/截面 直径(mm) Width/section diameter	标准节长(m) Standard section length	重量(kg) Weight	吸油能力(kg/m) Oil-absorbing capability	最大U型拖拽 速度(Kn) Max.U-typetowing speed
XTL-1000	1000	20	12	14	2
XTL300	300	10	3	10	2

